
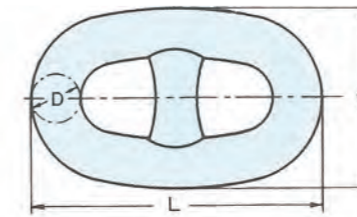


STUD LINK ANCHOR CHAIN

スタッドリンクチェーン (JIS F3303-2010)

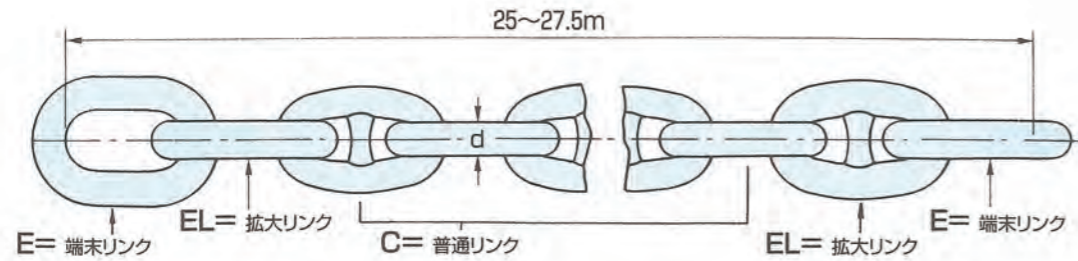

D = 1d ± Tolerance
L = 6d ± 2.5%
W = 3.6d ± 2.5%

呼び径 m/m Nominal diameter d mm	リンクの種類 Kind of Link	径 m/m Diameter			外長 m/m Length			外幅 m/m Width			27.5mのリンク数 No. of link Per 27.5m Approx	25mのリンク数 No. of link Per 25m Approx
		最小 Min mm	標準 Sta mm	最大 Max mm	最小 Min mm	標準 Sta mm	最大 Max mm	最小 Min mm	標準 Sta mm	最大 Max mm		
16	C	15.0	16.0	17.5	93.6	96.0	98.4	56.2	57.6	59.0	423	385
	EL	16.6	17.6	19.1	101.4	104.0	106.6	62.4	64.0	65.6	2	2
	E	18.2	19.2	20.7	105.3	108.0	113.4	62.4	64.0	67.2	2	2
17.5	C	16.5	17.5	19.0	102.4	105.0	107.6	61.5	63.0	64.5	387	353
	EL	18.2	19.2	20.7	111.0	113.8	116.6	68.3	70.0	71.7	2	2
	E	20.0	21.0	22.5	115.2	118.1	124.0	68.3	70.0	73.5	2	2
19	C	18.0	19.0	20.5	111.2	114.0	116.8	66.6	68.4	70.1	357	323
	EL	19.9	20.9	22.4	120.5	123.5	126.5	74.1	76.0	77.9	2	2
	E	21.8	22.8	24.3	125.1	128.3	134.7	74.1	76.0	79.8	2	2
20.5	C	19.5	20.5	22.0	120.0	123.0	126.0	71.9	73.8	75.6	331	301
	EL	21.5	22.5	24.0	130.0	133.3	136.6	80.0	82.0	84.0	2	2
	E	23.6	24.6	26.1	135.0	138.4	145.3	80.0	82.0	86.1	2	2
22	C	21.0	22.0	23.5	128.7	132.0	135.3	77.2	79.2	81.1	307	279
	EL	23.2	24.2	25.7	139.5	143.0	146.5	85.8	88.0	90.2	2	2
	E	25.4	26.4	27.9	144.8	148.5	155.9	85.8	88.0	92.4	2	2
24	C	23.0	24.0	25.5	140.4	144.0	147.6	84.3	86.4	88.5	281	255
	EL	25.4	26.4	27.9	152.1	156.0	159.9	93.6	96.0	98.4	2	2
	E	27.8	28.8	30.3	158.0	162.0	170.1	93.6	96.0	100.8	2	2
25	C	24.0	25.0	26.5	146.3	150.0	153.7	87.8	90.0	92.2	269	245
	EL	26.5	27.5	29.0	158.5	162.5	166.5	97.5	100.0	102.5	2	2
	E	29.0	30.0	31.5	164.6	168.8	177.2	97.5	100.0	105.0	2	2
26	C	25.0	26.0	27.5	152.1	156.0	159.9	91.3	93.6	95.9	259	235
	EL	27.6	28.6	30.1	164.8	169.0	173.2	101.4	104.0	106.6	2	2
	E	30.2	31.2	32.7	171.2	175.5	184.2	101.4	104.0	109.2	2	2
28	C	27.0	28.0	29.5	163.8	168.0	172.2	98.3	100.8	103.3	241	219
	EL	29.8	30.8	32.3	177.5	182.0	186.5	109.2	112.0	114.8	2	2
	E	32.6	33.6	35.2	184.3	189.0	198.4	109.2	112.0	117.6	2	2
30	C	29.0	30.0	31.5	175.5	180.0	184.5	105.3	108.0	110.7	225	203
	EL	32.0	33.0	34.7	190.2	195.0	199.8	117.0	120.0	123.0	2	2
	E	35.0	36.0	37.8	197.5	202.5	212.6	117.0	120.0	126.0	2	2
32	C	31.0	32.0	33.6	187.2	192.0	196.8	112.4	115.2	118.0	209	191
	EL	34.2	35.2	37.0	202.8	208.0	213.2	124.8	128.0	131.2	2	2
	E	37.4	38.4	40.3	210.6	216.0	226.8	124.8	128.0	134.4	2	2
34	C	33.0	34.0	35.7	198.9	204.0	209.1	119.4	122.4	125.4	197	179
	EL	36.4	37.4	39.3	216.5	222.0	227.5	132.6	136.0	139.4	2	2
	E	38.8	40.8	42.8	223.8	229.5	240.9	132.6	136.0	142.8	2	2
36	C	35.0	36.0	37.8	210.6	216.0	221.4	126.4	129.6	132.8	185	169
	EL	38.6	39.6	41.6	228.2	234.0	239.8	140.4	144.0	147.6	2	2
	E	41.2	43.2	45.4	237.0	243.0	255.1	140.4	144.0	151.2	2	2
38	C	37.0	38.0	39.9	222.3	228.0	233.7	133.4	136.8	140.2	175	159
	EL	39.8	41.8	43.7	240.9	247.0	253.1	148.2	152.0	155.8	2	2
	E	43.6	45.6	47.5	249.6	256.0	268.8	148.2	152.0	159.6	2	2
40	C	39.0	40.0	42.0	234.0	240.0	246.0	140.4	144.0	147.6	167	151
	EL	42.0	44.0	46.2	253.5	260.0	266.5	156.0	160.0	164.0	2	2
	E	46.0	48.0	50.4	263.3	270.0	283.5	156.0	160.0	168.0	2	2
42	C	40.0	42.0	44.1	245.7	252.0	258.3	147.5	151.2	154.9	159	143
	EL	44.2	46.2	48.5	266.2	273.0	279.8	163.8	168.0	172.2	2	2
	E	48.4	50.4	52.9	276.5	283.5	297.6	163.8	168.0	176.4	2	2
44	C	42.0	44.0	46.2	257.4	264.0	270.6	154.5	158.4	162.3	151	137
	EL	46.4	48.4	50.8	278.9	286.0	293.1	171.6	176.0	180.4	2	2
	E	50.8	52.8	55.4	289.6	297.0	311.8	171.6	176.0	184.8	2	2

呼び径 m/m Nominal diameter d mm	第1種 Mild Steel		第2種 Special Steel		第3種 Extra Special Steel		チェーン1mの質量(最小) kg
	切断試験荷重kN (tf) Breaking test	耐力試験荷重kN (tf) Proof test	切断試験荷重kN (tf) Breaking test	耐力試験荷重kN (tf) Proof test	切断試験荷重kN (tf) Breaking test	耐力試験荷重kN (tf) Proof test	
16	107 (10.9)	76 (7.70)	150 (15.3)	107 (10.9)	216 (22.0)	150 (15.3)	5.606
17.5	127 (13.0)	89 (9.10)	179 (18.3)	127 (13.0)	256 (26.1)	179 (18.3)	6.707
19	150 (15.3)	105 (10.7)	211 (21.5)	150 (15.3)	301 (30.7)	211 (21.5)	7.906
20.5	175 (17.8)	123 (12.6)	244 (24.9)	175 (17.8)	349 (35.6)	244 (24.9)	9.203
22	200 (20.4)	140 (14.3)	280 (28.6)	200 (20.4)	401 (40.9)	280 (28.6)	10.60
24	237 (24.2)	167 (17.0)	332 (33.9)	237 (24.2)	476 (48.5)	332 (33.9)	12.61
25	258 (26.3)	180 (18.4)	360 (36.8)	258 (26.3)	515 (52.5)	360 (36.8)	13.69
26	278 (28.3)	194 (19.8)	389 (39.7)	278 (28.3)	556 (56.7)	389 (39.7)	14.80
28	321 (32.7)	225 (22.9)	449 (45.8)	321 (32.7)	642 (65.5)	449 (45.8)	17.17
30	368 (37.5)	257 (26.2)	514 (52.4)	368 (37.5)	735 (74.9)	514 (52.4)	19.71
32	417 (42.5)	291 (29.7)	583 (59.4)	417 (42.5)	833 (84.9)	583 (59.4)	22.43
34	468 (47.7)	328 (33.4)	655 (66.8)	468 (47.7)	937 (95.9)	655 (66.8)	25.32
36	523 (53.3)	366 (37.3)	732 (74.6)	523 (53.3)	1050 (107)	732 (74.6)	28.38
38	581 (59.2)	406 (41.4)	812 (82.8)	581 (59.2)	1160 (118)	812 (82.8)	31.62
40	640 (65.3)	448 (45.7)	896 (91.4)	640 (65.3)	1280 (131)	896 (91.4)	35.04
42	703 (71.7)	492 (50.2)	981 (100)	703 (71.7)	1400 (143)	981 (100)	38.63
44	769 (78.4)	538 (54.8)	1080 (110)	769 (78.4)	1540 (157)	1080 (110)	42.40