



# STUD LINK ANCHOR CHAIN スタッドリンクチェーン(JIS F3303-2010)

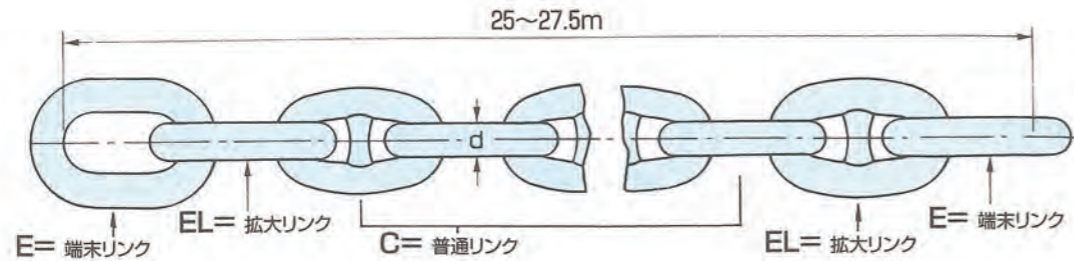

D = 1d ± Tolerance  
L = 6d ± 2.5%  
W = 3.6d ± 2.5%

呼び径 m/m Nominal diameter d mm	リンクの種類 Kind of Link	径 m/m Diameter			外長 m/m Length			外幅 m/m Width			27.5mのリンク数 No. of link Per 27.5m Approx	25mのリンク数 No. of link Per 25m Approx
		最小 Min mm	標準 Sta mm	最大 Max mm	最小 Min mm	標準 Sta mm	最大 Max mm	最小 Min mm	標準 Sta mm	最大 Max mm		
46	C	44.0	46.0	48.3	269.1	276.0	282.9	161.5	165.6	169.7	145	131
	EL	48.6	50.6	53.1	291.6	299.0	306.4	179.4	184.0	188.6	2	2
	E	53.2	55.2	57.9	302.8	310.5	326.0	179.4	184.0	193.2	2	2
48	C	46.0	48.0	50.4	280.8	288.0	295.2	168.5	172.8	177.1	139	125
	EL	50.8	52.8	55.4	304.2	312.0	319.8	187.2	192.0	196.8	2	2
	E	55.6	57.6	60.4	315.9	324.0	340.2	187.2	192.0	201.6	2	2
50	C	48.0	50.0	52.5	292.5	300.0	307.5	175.5	180.0	184.5	133	119
	EL	53.0	55.0	57.7	316.9	325.0	333.1	195.0	200.0	205.0	2	2
	E	58.0	60.0	63.0	329.1	337.5	354.3	195.0	200.0	210.0	2	2
52	C	50.0	52.0	54.6	304.2	312.0	319.8	182.6	187.2	191.8	127	115
	EL	55.2	57.2	60.0	329.6	338.0	346.4	202.8	208.0	213.2	2	2
	E	60.4	62.4	65.5	342.3	351.0	368.5	202.8	208.0	218.4	2	2
54	C	52.0	54.0	56.7	315.9	324.0	332.1	189.6	194.4	199.2	123	111
	EL	57.4	59.4	62.3	342.3	351.0	359.7	210.6	216.0	221.4	2	2
	E	62.8	64.8	68.0	355.4	364.5	382.7	210.6	216.0	226.8	2	2
56	C	54.0	56.0	58.8	327.6	336.0	344.4	196.6	201.6	206.6	117	107
	EL	59.6	61.6	64.6	354.9	364.0	373.1	218.4	224.0	229.6	2	2
	E	65.2	67.2	70.6	368.6	378.0	396.9	218.4	224.0	235.2	2	2
58	C	56.0	58.0	60.9	339.3	348.0	356.7	203.6	208.8	214.0	113	103
	EL	61.8	63.8	66.7	367.6	377.0	386.4	226.2	232.0	237.8	2	2
	E	67.6	69.6	73.1	381.8	391.5	411.0	226.2	232.0	243.6	2	2
60	C	58.0	60.0	63.0	351.0	360.0	369.0	210.6	216.0	221.4	109	99
	EL	64.0	66.0	69.3	380.3	390.0	399.7	234.0	240.0	246.0	2	2
	E	70.0	72.0	75.6	394.9	405.0	425.2	234.0	240.0	252.0	2	2
62	C	60.0	62.0	65.1	362.7	372.0	381.3	217.7	223.2	228.7	105	97
	EL	66.2	68.2	71.6	393.0	403.0	413.0	241.8	248.0	254.2	2	2
	E	72.4	74.4	78.1	408.1	418.5	439.4	241.8	248.0	260.4	2	2
64	C	62.0	64.0	67.2	374.4	384.0	393.6	224.7	230.4	236.1	103	93
	EL	68.4	70.4	73.9	405.6	416.0	426.4	249.6	256.0	262.4	2	2
	E	74.8	76.8	80.6	421.2	432.0	453.6	249.6	256.0	268.8	2	2
66	C	64.0	66.0	69.3	386.1	396.0	405.9	231.7	237.6	243.5	99	89
	EL	70.6	72.6	76.2	418.3	429.0	439.7	257.4	264.0	270.6	2	2
	E	77.2	79.2	83.1	434.4	445.5	467.7	257.4	264.0	277.2	2	2
68	C	66.0	68.0	71.4	397.8	408.0	418.2	238.7	244.8	250.9	97	87
	EL	72.8	74.8	78.5	431.0	442.0	453.0	265.2	272.0	278.8	2	2
	E	79.6	81.6	85.6	447.6	459.0	481.9	265.2	272.0	285.6	2	2
70	C	68.0	70.0	73.5	409.5	420.0	430.5	246.7	253.0	259.3	93	85
	EL	75.0	77.0	80.8	443.7	455.0	466.3	273.0	280.0	287.0	2	2
	E	82.0	84.0	88.2	460.7	472.5	496.1	273.0	280.0	294.0	2	2
73	C	71.0	73.0	76.6	427.1	438.0	448.9	256.3	262.8	269.3	89	81
	EL	78.3	80.3	84.3	462.7	474.5	486.3	284.7	292.0	299.3	2	2
	E	84.6	87.6	91.9	480.5	492.8	517.4	284.7	292.0	306.6	2	2
76	C	74.0	76.0	79.8	444.6	456.0	467.4	266.8	273.6	280.4	85	77
	EL	81.6	83.6	87.7	481.7	494.0	506.3	296.4	304.0	311.6	2	2
	E	88.2	91.2	95.7	500.2	513.0	538.6	296.4	304.0	319.2	2	2

呼び径 m/m Nominal diameter d mm	第1種 Mild Steel		第2種 Special Steel		第3種 Extra Special Steel		チェーン1mの質量(最小) kg
	切断試験荷重kN (tf) Breaking test	耐力試験荷重kN (tf) Proof test	切断試験荷重kN (tf) Breaking test	耐力試験荷重kN (tf) Proof test	切断試験荷重kN (tf) Breaking test	耐力試験荷重kN (tf) Proof test	
46	837 (85.3)	585 (69.7)	1170 (119)	837 (85.3)	1680 (171)	1170 (119)	46.34
48	908 (92.6)	635 (64.8)	1270 (130)	908 (92.6)	1810 (185)	1270 (130)	50.46
50	981 (100)	696 (70.0)	1370 (140)	981 (100)	1960 (200)	1370 (140)	54.75
52	1060 (108)	739 (75.4)	1480 (151)	1060 (108)	2110 (215)	1480 (151)	59.22
54	1140 (116)	794 (81.0)	1590 (162)	1140 (116)	2270 (231)	1590 (162)	63.86
56	1220 (124)	851 (86.8)	1710 (174)	1220 (124)	2430 (248)	1710 (174)	68.68
58	1290 (132)	909 (92.7)	1810 (185)	1290 (132)	2600 (266)	1810 (185)	73.67
60	1380 (141)	969 (98.8)	1940 (198)	1380 (141)	2770 (282)	1940 (198)	78.84
62	1470 (150)	1030 (105)	2060 (210)	1470 (150)	2940 (300)	2060 (210)	84.18
64	1560 (159)	1100 (112)	2190 (223)	1560 (159)	3130 (319)	2190 (223)	89.70
66	1660 (169)	1160 (118)	2310 (236)	1660 (169)	3300 (337)	2310 (236)	95.40
68	1750 (178)	1230 (125)	2450 (250)	1750 (178)	3500 (357)	2450 (250)	101.3
70	1840 (188)	1290 (132)	2580 (263)	1840 (188)	3690 (376)	2580 (263)	107.3
73	1990 (203)	1390 (142)	2790 (285)	1990 (203)	3990 (407)	2790 (285)	116.7
76	2150 (219)	1500 (153)	3010 (307)	2150 (219)	4300 (428)	3010 (307)	126.5

参考 表中の値は、次の計算式によっている。

チェーンの種類	切断試験荷重(N)	耐力試験荷重(N)	チェーン1mの質量(kg)
スタッドなしチェーン	370d <sup>2</sup>	184d <sup>2</sup>	0.0217d <sup>2</sup>
第1種チェーン	9.81d <sup>2</sup> (44-0.08d)	6.87d <sup>2</sup> (44-0.08d)	0.0219d <sup>2</sup>
第2種チェーン	13.7d <sup>2</sup> (44-0.08d)	9.81d <sup>2</sup> (44-0.08d)	0.0219d <sup>2</sup>
第3種チェーン	19.6d <sup>2</sup> (44-0.08d)	13.7d <sup>2</sup> (44-0.08d)	0.0219d <sup>2</sup>