


STUDLESS ANCHOR CHAIN

スタッドなしアンカーチェーン(JIS F3303-2010)

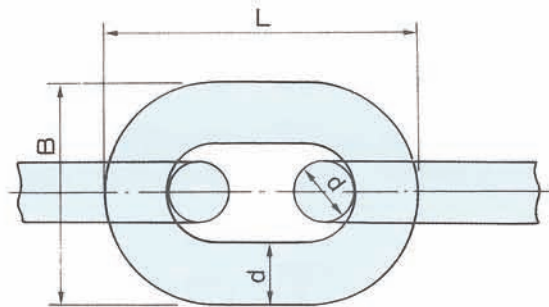

$$L=4.9d$$

$$B=3.5d$$

呼び径 m/m	リンク の種類	径 m/m(d)			外 長 m/m(L)			外 幅 m/m(B)			切断試験 荷重 kN(tf)	耐力試験 荷重 kN(tf)	チェーン1m の質量 (最小)
		最小	標準	最大	最小	標準	最大	最小	標準	最大			
Nominal diameter d mm	Kind of Link	Diameter			Length			Width			Breaking test	Proof test	kg
		Min mm	Sta mm	Max mm	Min mm	Sta mm	Max mm	Min mm	Sta mm	Max mm			
16	C	15.0	16.0	17.5	76.4	78.4	80.4	54.6	56.0	57.4	95	47	5.56
	E	16.6	17.6	19.1	93.6	96.0	100.8	59.3	60.8	63.8	(9.68)	(4.79)	
17.5	C	16.5	17.5	19.0	83.6	85.8	87.9	59.7	61.3	62.8	113	57	6.66
	E	18.3	19.3	20.8	102.4	105.0	110.3	64.8	66.5	69.8	(11.51)	(5.81)	
19	C	18.0	19.0	20.5	90.8	93.1	95.4	64.8	66.5	68.2	113	67	7.84
	E	19.9	20.9	22.4	111.2	114.0	119.7	70.4	72.2	75.8	(13.55)	(6.83)	
20.5	C	19.5	20.5	22.0	97.9	100.5	103.0	70.0	71.8	73.5	155	78	9.14
	E	21.6	22.6	24.1	119.9	123.0	129.2	76.0	77.9	81.8	(15.80)	(7.95)	
22	C	21.0	22.0	23.5	105.1	107.8	110.5	75.1	77.0	78.9	178	89	10.52
	E	23.2	24.2	25.7	128.7	132.0	138.6	81.5	83.6	87.8	(18.14)	(9.07)	
24	C	23.0	24.0	25.5	114.7	117.6	120.5	81.9	84.0	86.1	213	107	12.52
	E	25.4	26.4	27.9	140.4	144.0	151.2	88.9	91.2	95.8	(21.71)	(10.90)	
25	C	24.0	25.0	26.5	119.4	122.5	125.6	85.3	87.5	89.7	231	115	13.56
	E	26.5	27.5	29.0	146.3	150.0	157.5	92.6	95.0	99.8	(23.54)	(11.72)	
26	C	25.0	26.0	27.5	124.2	127.4	130.6	88.7	91.0	93.3	250	125	14.72
	E	27.6	28.6	30.1	152.1	156.0	163.8	96.3	98.8	103.7	(25.48)	(12.74)	
28	C	27.0	28.0	29.5	133.8	137.2	140.6	95.6	98.0	100.5	290	145	17.08
	E	29.8	30.8	32.3	163.8	168.0	176.4	103.7	106.4	111.7	(29.56)	(14.78)	
30	C	29.0	30.0	31.5	143.3	147.0	150.7	102.4	105.0	107.6	332	174	19.60
	E	32.0	33.0	34.7	175.5	180.0	189.0	111.2	114.0	119.7	(33.84)	(17.73)	
32	C	31.0	32.0	33.6	152.9	156.8	160.7	109.2	112.0	114.8	379	189	22.28
	E	34.2	35.2	37.0	187.2	192.0	201.6	118.6	121.6	127.7	(38.63)	(19.26)	
34	C	33.0	34.0	35.7	162.4	166.6	170.8	116.0	119.0	122.0	428	214	25.16
	E	36.4	37.4	39.3	198.9	204.0	214.2	126.0	129.2	135.7	(43.62)	(21.81)	
36	C	35.0	36.0	37.8	172.0	176.4	180.8	122.9	126.0	129.2	480	239	28.20
	E	38.6	39.6	41.6	210.6	216.0	226.8	133.4	136.8	143.6	(48.92)	(24.36)	
38	C	37.0	38.0	39.9	181.5	186.2	190.9	129.7	133.0	136.3	533	267	31.44
	E	40.8	41.8	43.9	222.3	228.0	239.4	140.8	144.4	151.6	(54.33)	(27.21)	
40	C	38.0	40.0	42.0	191.1	196.0	200.9	136.5	140.0	143.5	591	296	34.80
	E	42.0	44.0	46.2	234.0	240.0	252.0	148.2	152.0	159.6	(60.24)	(30.17)	
42	C	40.0	42.0	44.1	200.7	205.8	210.9	143.3	147.0	150.7	652	327	38.40
	E	44.2	46.2	48.5	245.7	252.0	264.6	155.6	159.6	167.6	(66.46)	(33.33)	
44	C	42.0	44.0	46.2	210.2	215.6	221.0	150.2	154.0	157.9	716	358	42.00
	E	46.4	48.4	50.8	257.4	264.0	277.2	163.0	167.2	175.6	(72.98)	(36.49)	
46	C	44.0	46.0	48.3	219.8	225.4	231.0	157.0	161.0	165.0	783	391	46.00
	E	48.6	50.6	53.1	269.1	276.0	289.8	170.4	174.8	183.5	(79.81)	(39.85)	
48	C	46.0	48.0	50.4	229.3	235.2	241.1	163.8	168.0	172.2	852	426	50.00
	E	50.8	52.8	55.4	280.8	288.0	302.4	177.8	182.4	191.5	(86.85)	(43.42)	
50	C	48.0	50.0	52.5	238.9	245.0	251.1	170.6	175.0	179.4	925	462	54.40
	E	53.0	55.0	57.8	292.5	300.0	315.0	185.3	190.0	199.5	(94.29)	(47.09)	